

37系列圆形射灯6W 暖光3000K测试报告

客户型号：MB006-37 RD 10051006

尺寸：A5纸张尺寸 142.5x210mm


要求：彩印 数量2000个

注意：红色虚线外框不要印出来！



Light SpectroPhotoColorMeter Analysis Report

Relative Spectral Energy Distribution:

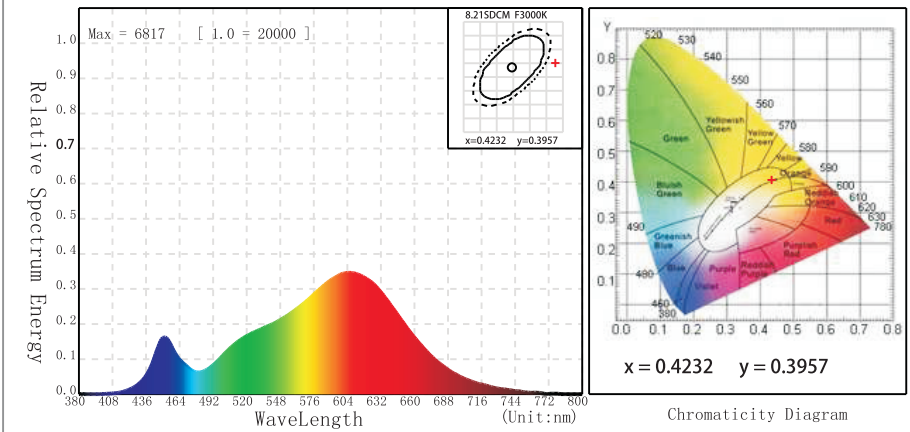

Main Parameters:

CCT	3000K	MainWave	583nm	Luminous	486.43lm	Efficiency	71.14
Current	0.058A	Voltage	220V	P	6.0W	PF	0.5
Average Color Index	80.0	No Flicker		Chromatic Coordinate	x=0.4232, y=0.3957 u=0.2453, v=0.3440		

Other Parameters:

ColorPurity	45.8%	PeakWave	595 nm	Peak	6816.7
HalfWaveLength	139.7nm	RedRatio	21.0 %	HZ	50 Hz
CRI:	R1 = 74.4 R2 = 83.0 R3 = 87.5 R4 = 73.1 R5 = 72.0 R6 = 73.2 R7 = 84.5 R8 = 59.9 R9 = 2.3 R10 = 57.1 R11 = 66.2 R12 = 44.4 R13 = 75.6 R14 = 92.1 R15 = 71.2				

Product Information:

Number	MB006-37 RD 10051006 3000K	Model	MB006-37 RD 10051006 3000K
Temperature	25°C	Humidity	≤95% R.H
Origin	MADE IN P. R. C.	Time	2018-04-16

Notes: THIS REPORT IS THE TEST DATA FROM THE MACHINE OF MANUFACTURER, THE RESULT TESTED BY PROFESSIONAL ENGINEER.