

40W 电镀SN圆形筒灯10系列暖光3000K测试报告

客户型号：MB040-10 RD SN 10131040

尺寸：A5纸张尺寸 142.5x210mm


要求：彩印 数量200个

注意：红色虚线外框不要印出来！



Light SpectroPhotoColorMeter Analysis Report

Relative Spectral Energy Distribution:

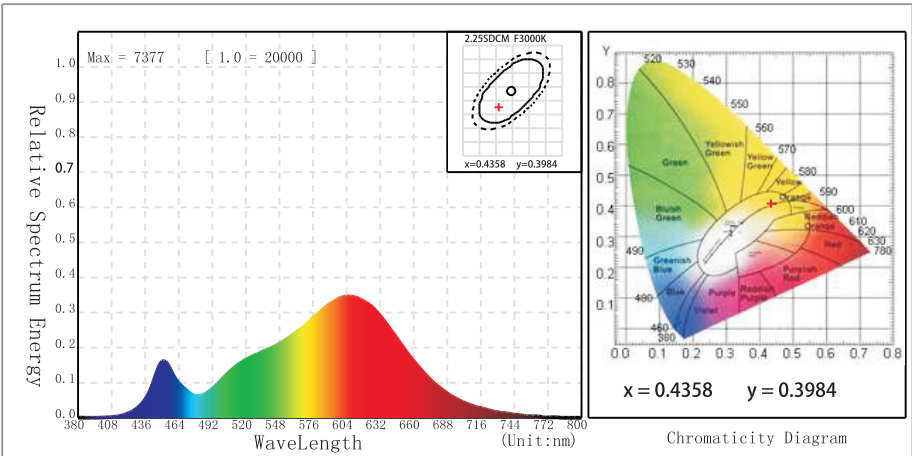

Main Parameters:

CCT	3000K	MainWave	584nm	Luminous	3418.13lm	Efficiency	84.8
Current	0.217A	Voltage	220V	P	40.0W	PF	0.5
Average Color Index	82.9	No Flicker		Chromatic Coordinate	x=0.4358, y=0.3984 u=0.2523, v=0.3460		

Other Parameters:

ColorPurity	50.4%	PeakWave	602 nm	Peak	7377.4
HalfWaveLength	126.4nm	RedRatio	22.0 %	HZ	50 Hz
CRI:	R1 = 71.5 R2 = 81.7 R3 = 88.6 R4 = 70.7 R5 = 69.4 R6 = 73.3 R7 = 80.8 R8 = 51.8 R9 = 0.18 R10 = 55.1 R11 = 64.3 R12 = 46.1 R13 = 72.9 R14 = 92.7 R15 = 66.4				

Product Information:

Number	MB040-10 RD SN 10131040 3000K	Model	MB040-10 RD SN 10131040 3000K
Temperature	25°C	Humidity	≤95% R.H
Origin	MADE IN P. R. C.	Time	2018-04-16

Notes: THIS REPORT IS THE TEST DATA FROM THE MACHINE OF MANUFACTURER, THE RESULT TESTED BY PROFESSIONAL ENGINEER.