

HOPOO GONIOPHOTOMETERS SYSTEM TEST REPORT


STREETLIGHT PHOTOMETRIC TEST REPORT

Report number:

MANUFACTURER:		
Address:		
NAME: 6W	TYPE: WALLVASHER	WEIGHT:
SPECIFICATION:	DIMENSION: 250*35*65	SERIAL No.: LA/YE6L-990706


MODEL:	SMD	I _{max} (cd):	2643	Effective Flux(lm):	416.3
NOMINAL POWER(W):	6	MAXIMUM(C, γ):	270, 3.0	EEI	0.166
RATED VOLTAGE(V):	230	EFFICIENCY(%):	100.0	Voltage(V)	230.8
NOMINAL FLUX(lm):	416.3	η street_up(%):	0.0	Current(A)	0.055
TEST FLUX(lm):	416.3	η street_down(%):	38.5	Power(W)	6.370
LAMPS QUANTITY:	1	η house_up(%):	0.0	Power Factor	0.494
TOTAL RADIANT(mw):	416.3	η house_down(%):	61.5	EEFICIENCY(lm/W)	65.4

INTENSITY DISTRIBUTION DIAGRAM
IN C PLANS

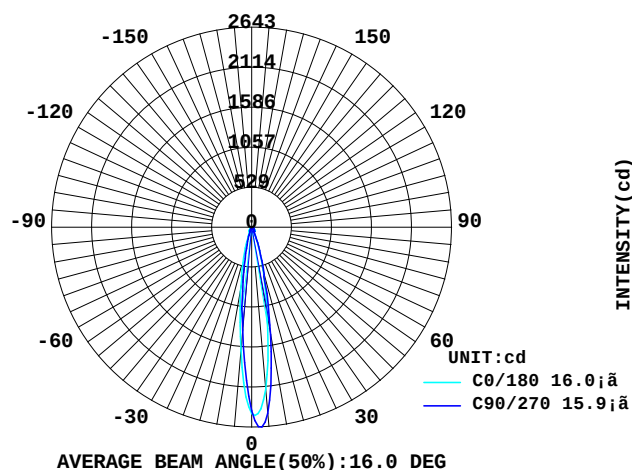

INTENSITY DISTRIBUTION DIAGRAM
IN C PLANS

LUMINOUS INTENSITY DISTRIBUTION

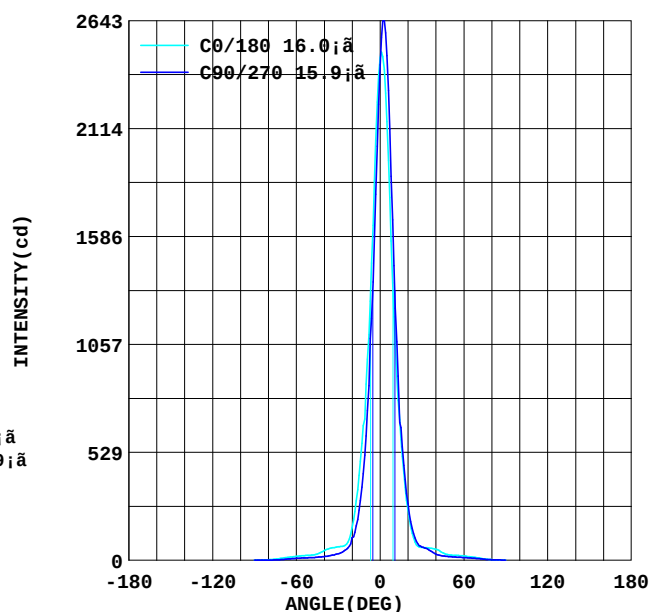

Test System:HOP00 HPG1600
Temperature:25.3DEG
Operators:
Test Date:10-07-2020

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:5.150 m
Remarks:

HOP00 GONIOPHOTOMETERS SYSTEM TEST REPORT

Color Temperature Data List

Report number:

MANUFACTURER:		
Address:		
NAME: 6W	TYPE: WALLVASHER	WEIGHT:
SPECIFICATION:	DIMENSION: 250*35*65	SERIAL No.: LA/YE6L-990706

Test System:HOP00 HPG1600
Temperature:25.3DEG
Operators:
Test Date:10-07-2020


Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:5.150 m
Remarks:

HOP00 GONIOPHOTOMETERS SYSTEM TEST REPORT

AVERAGE AND CENTER E Figure

Report number:

MANUFACTURER:		
Address:		
NAME: 6W	TYPE: WALLVASHER	WEIGHT:
SPECIFICATION:	DIMENSION: 250*35*65	SERIAL No.: LA/YE6L-990706

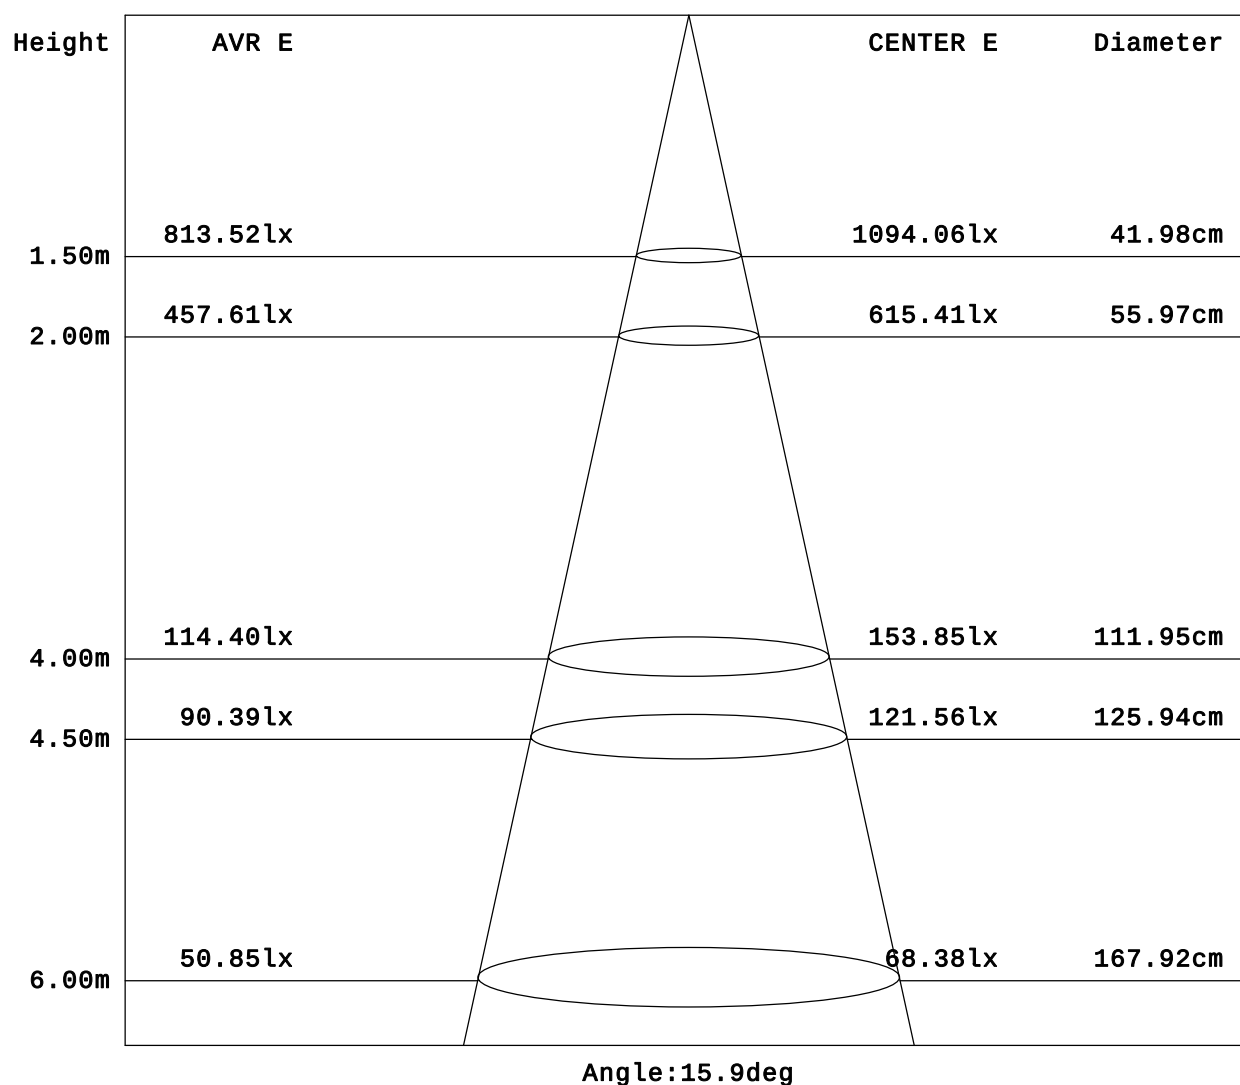

Test System:HOP00 HPG1600
Temperature:25.3DEG
Operators:
Test Date:10-07-2020

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:5.150 m
Remarks:

HOP00 GONIOPHOTOMETERS SYSTEM TEST REPORT

ZONAL FLUX DIAGRAM

Report number:

MANUFACTURER:		
Address:		
NAME: 6W	TYPE: WALLVASHER	WEIGHT:
SPECIFICATION:	DIMENSION: 250*35*65	SERIAL No.: LA/YE6L-990706

γ	C0	C90	C180	C270					γ	zone	total
5.0	1640	1363	2148	2471					0- 5	51.61	51.61
10.0	863.2	608.8	1192	1443					5- 10	100.8	152.4
15.0	415.5	245.0	589.7	649.0					10- 15	82.83	235.3
20.0	159.2	109.7	247.3	276.2					15- 20	51.48	286.8
25.0	73.54	48.88	89.27	109.6					20- 25	26.28	313.0
30.0	66.49	31.98	62.85	65.35					25- 30	16.31	329.4
35.0	59.72	23.73	60.60	51.45					30- 35	15.59	345.0
40.0	47.21	18.56	54.37	30.04					35- 40	14.44	359.4
45.0	30.63	15.19	36.20	21.56					40- 45	11.63	371.0
50.0	24.98	12.94	26.23	18.03					45- 50	9.163	380.2
55.0	22.80	11.59	24.08	15.38					50- 55	8.443	388.6
60.0	19.54	9.521	21.24	13.60					55- 60	8.022	396.7
65.0	15.59	6.975	17.00	11.29					60- 65	6.977	403.6
70.0	10.63	3.845	12.12	8.540					65- 70	5.467	409.1
75.0	5.861	2.015	6.763	5.331					70- 75	3.565	412.7
80.0	2.943	0.928	3.474	3.023					75- 80	1.955	414.6
85.0	1.538	0.451	1.617	1.856					80- 85	1.033	415.7
90.0	1.193	0.451	1.273	1.273					85- 90	0.625	416.3
95.0									90- 95		
100.0									95-100		
105.0									100-105		
110.0									105-110		
115.0									110-115		
120.0									115-120		
125.0									120-125		
130.0									125-130		
135.0									130-135		
140.0									135-140		
145.0									140-145		
150.0									145-150		
155.0									150-155		
160.0									155-160		
165.0									160-165		
170.0									165-170		
175.0									170-175		
180.0									175-180		
DEG	LUMINOUS INTENSITY:cd									UNIT: lm	

Test System:HOP00 HPG1600
 Temperature:25.3DEG
 Operators:
 Test Date:10-07-2020


Test Set: 5.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:5.150 m
 Remarks:

HOP00 GONIOPHOTOMETERS SYSTEM TEST REPORT

ISOCANDELA DIAGRAM

Report number:

MANUFACTURER:		
Address:		
NAME: 6W	TYPE: WALLVASHER	WEIGHT:
SPECIFICATION:	DIMENSION: 250*35*65	SERIAL No.: LA/YE6L-990706

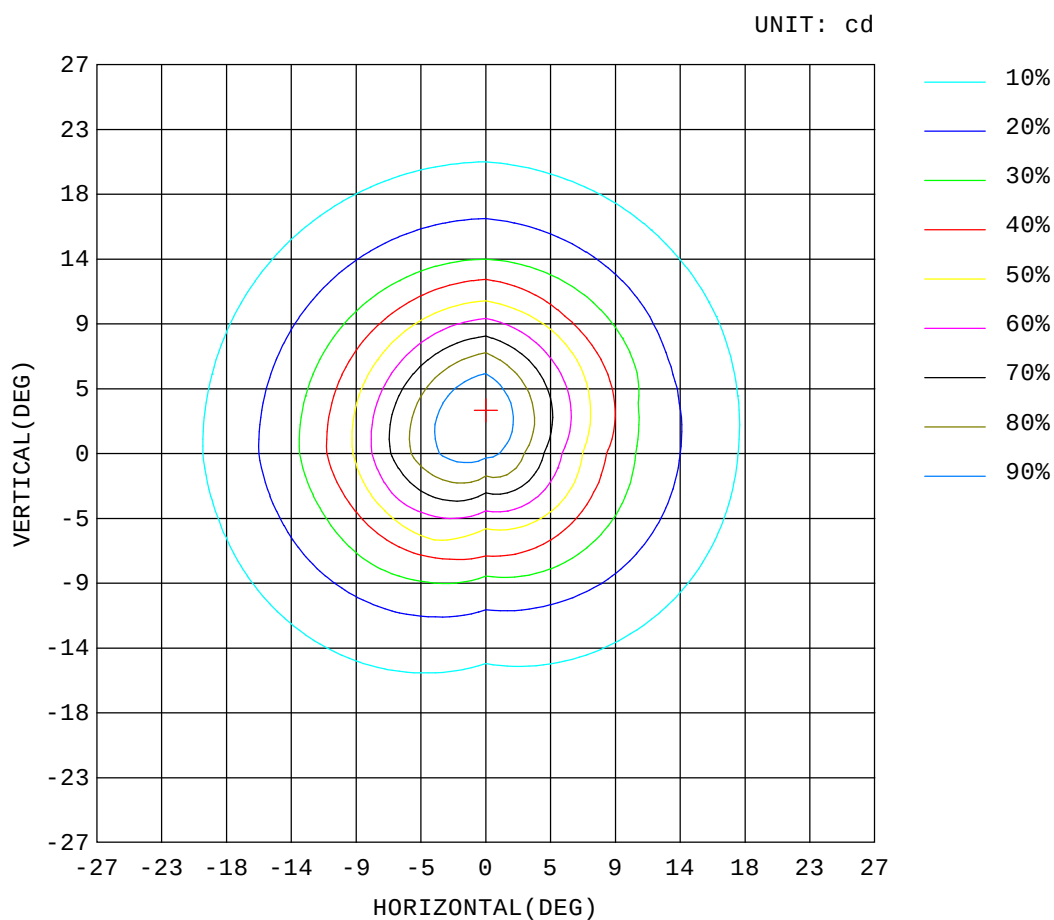

Test System:HOP00 HPG1600
Temperature:25.3DEG
Operators:
Test Date:10-07-2020

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:5.150 m
Remarks:



HOP00 GONIOPHOTOMETERS SYSTEM TEST REPORT

ISOLUX DIAGRAM

Report number:

MANUFACTURER:		
Address:		
NAME: 6W	TYPE: WALLVASHER	WEIGHT:
SPECIFICATION:	DIMENSION: 250*35*65	SERIAL No.: LA/YE6L-990706

ILLUMINANCE AT MH=10 m, Enadir = 24.62 lx

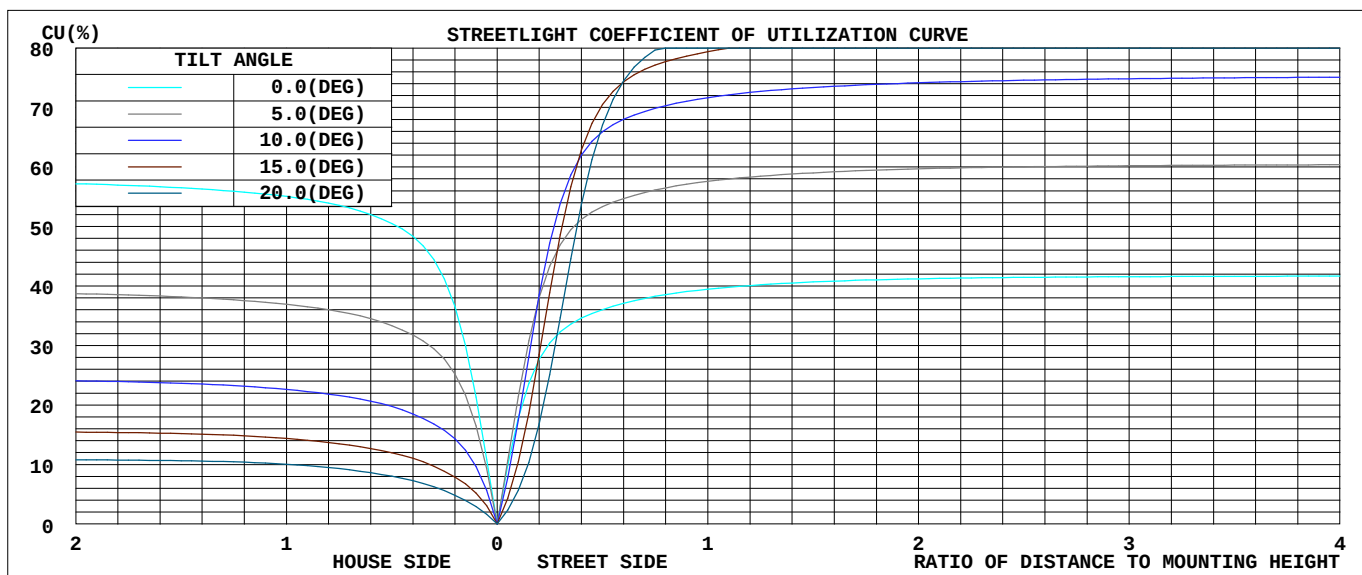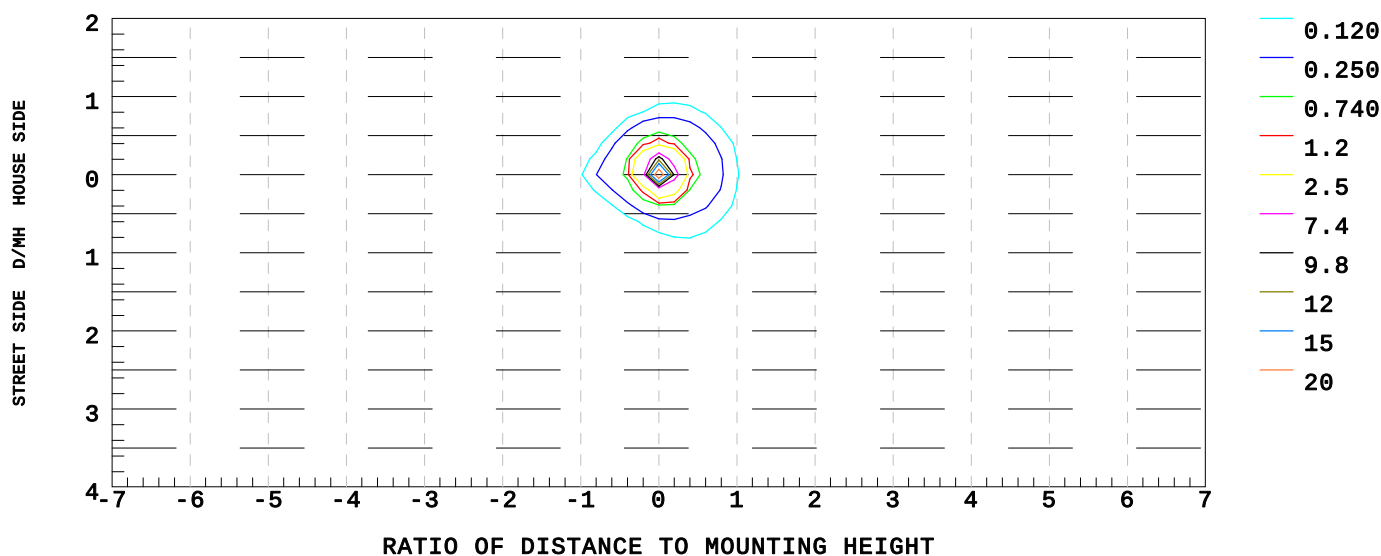

Test System:HOP00 HPG1600
Temperature:25.3DEG
Operators:
Test Date:10-07-2020


Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:5.150 m
Remarks:

HOP00 GONIOPHOTOMETERS SYSTEM TEST REPORT

ISOCANDELA DIAGRAM

Report number:

MANUFACTURER:		
Address:		
NAME: 6W	TYPE: WALLVASHER	WEIGHT:
SPECIFICATION:	DIMENSION: 250*35*65	SERIAL No.: LA/YE6L-990706

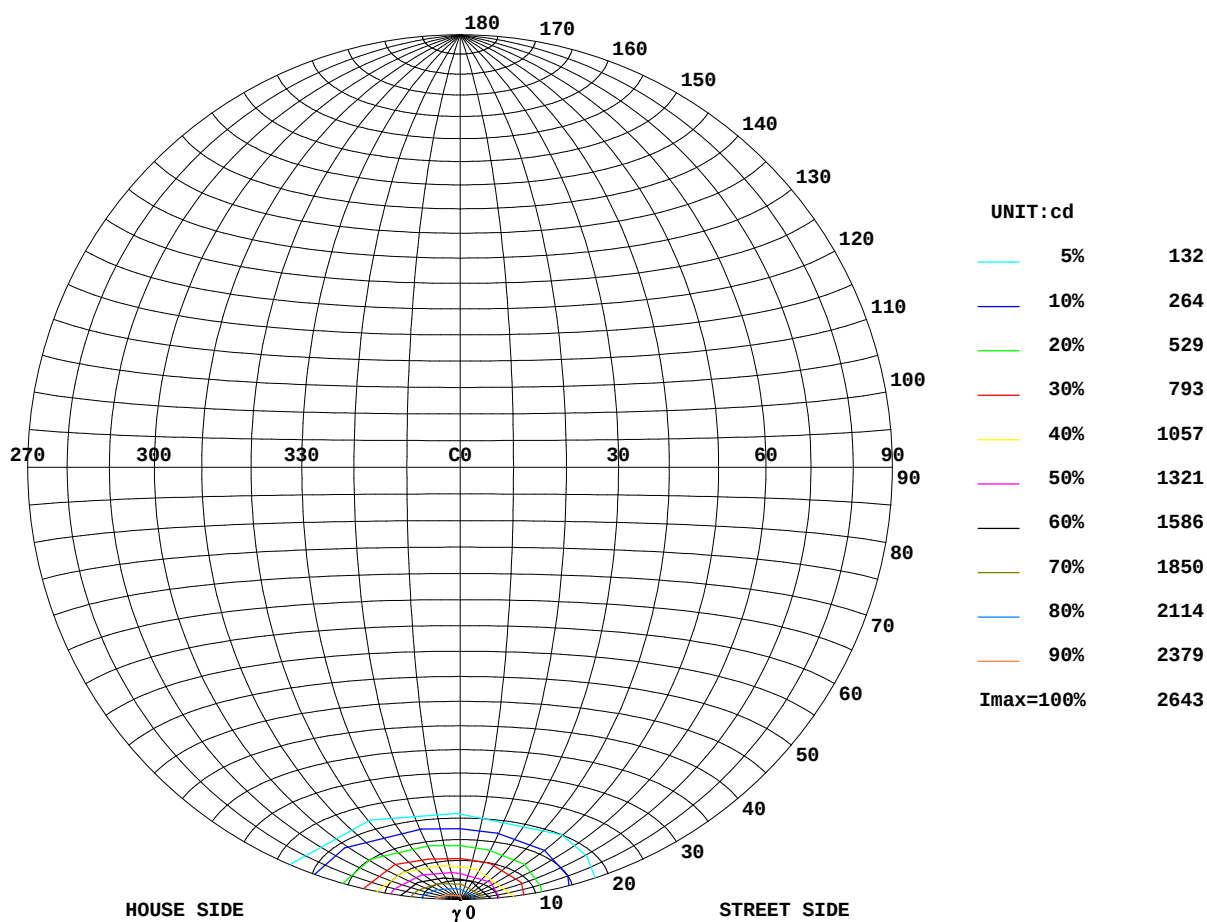

Test System:HOP00 HPG1600
Temperature:25.3DEG
Operators:
Test Date:10-07-2020


Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:5.150 m
Remarks:

HOP00 GONIOPHOTOMETERS SYSTEM TEST REPORT

ISOLUX DIAGRAM

Report number:

MANUFACTURER:		
Address:		
NAME: 6W	TYPE: WALLVASHER	WEIGHT:
SPECIFICATION:	DIMENSION: 250*35*65	SERIAL No.: LA/YE6L-990706

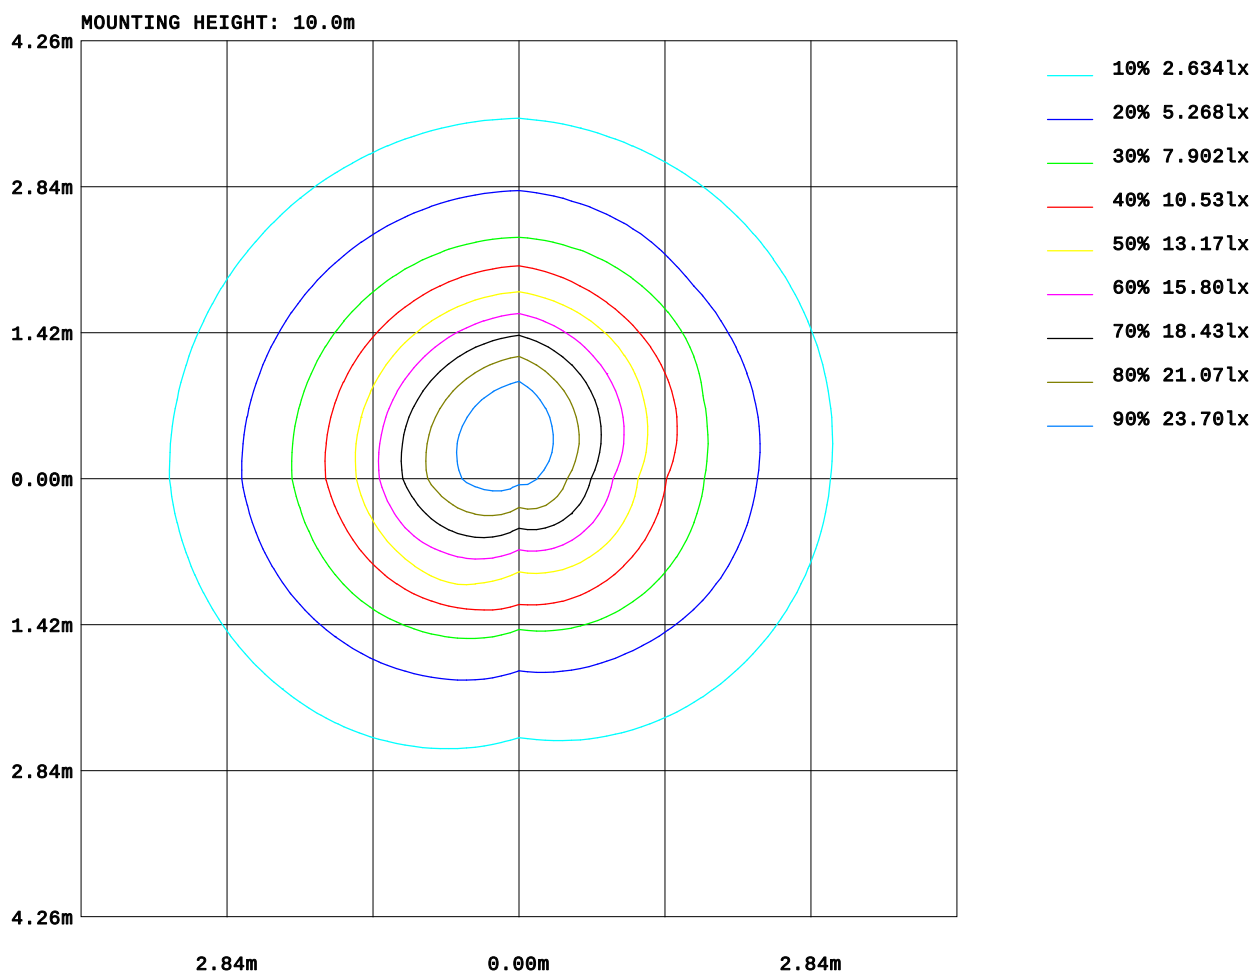

Test System:HOP00 HPG1600
Temperature:25.3DEG
Operators:
Test Date:10-07-2020


Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:5.150 m
Remarks:

HOP00 GONIOPHOTOMETERS SYSTEM TEST REPORT

ISOCANDELA DIAGRAM

Report number:

MANUFACTURER:		
Address:		
NAME: 6W	TYPE: WALLVASHER	WEIGHT:
SPECIFICATION:	DIMENSION: 250*35*65	SERIAL No.: LA/YE6L-990706

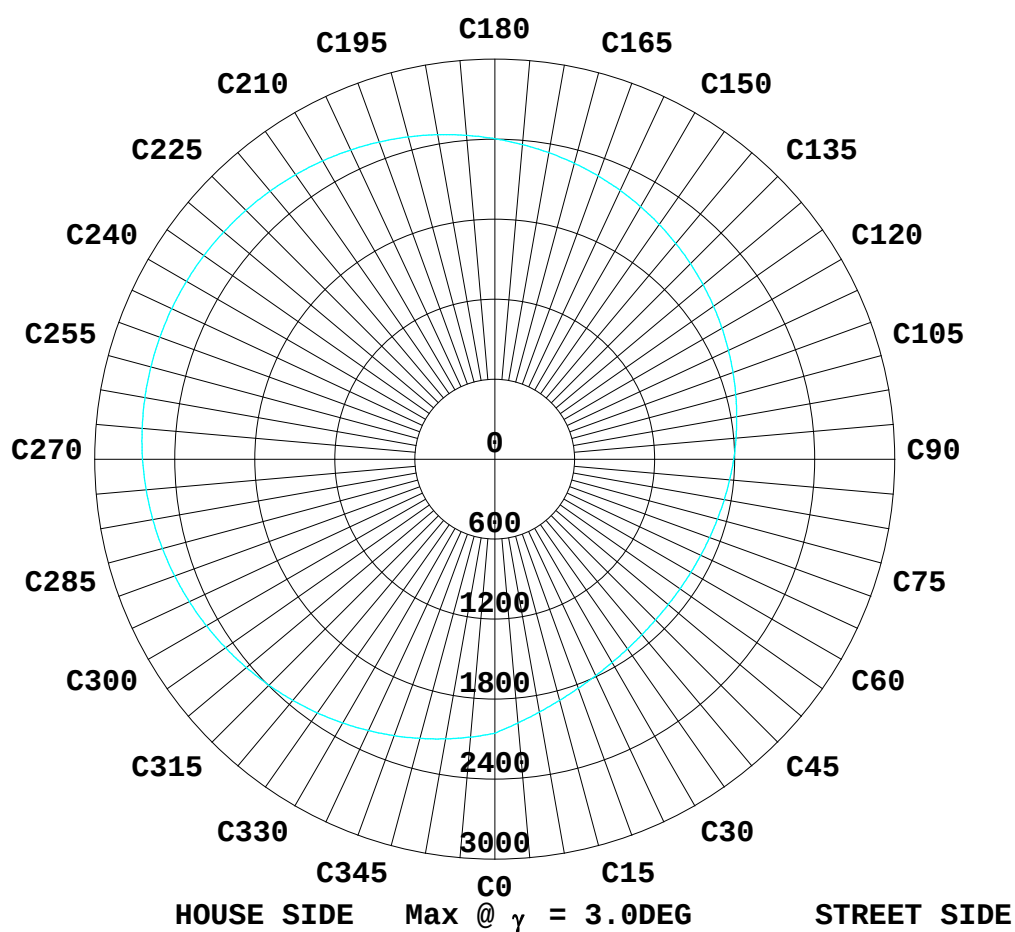

Test System:HOP00 HPG1600
Temperature:25.3DEG
Operators:
Test Date:10-07-2020

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:5.150 m
Remarks:

HOPOO GONIOPHOTOMETERS SYSTEM TEST REPORT

AREA LUMINOUS FLUX

Report number:

MANUFACTURER:																	
Address:																	
NAME: 6W									TYPE: WALLVASHER						WEIGHT:		
SPECIFICATION:									DIMENSION: 250*35*65						SERIAL No.: LA/YE6L-990706		

VERTICAL (DEG)	27	AREA FLUX DIAGRAM																		UNIT:lm		Φ t	Φ a
	0.14	0.15	0.16	0.17	0.18	0.21	0.23	0.26	0.28	0.28	0.26	0.23	0.21	0.19	0.17	0.16	0.15	0.13	3.55	3.55			
	24	0.15	0.16	0.17	0.19	0.24	0.30	0.37	0.43	0.47	0.47	0.42	0.35	0.28	0.23	0.19	0.17	0.16	0.15	4.91	4.91		
	21	0.15	0.16	0.19	0.26	0.36	0.49	0.63	0.75	0.82	0.81	0.71	0.58	0.44	0.32	0.24	0.19	0.17	0.16	7.43	7.43		
	18	0.16	0.18	0.25	0.38	0.56	0.79	1.03	1.24	1.38	1.35	1.18	0.95	0.70	0.48	0.32	0.23	0.18	0.16	11.5	11.5		
	15	0.16	0.21	0.34	0.55	0.84	1.21	1.58	1.92	2.17	2.13	1.81	1.43	1.05	0.71	0.44	0.28	0.20	0.17	17.2	17.2		
	12	0.17	0.26	0.45	0.75	1.18	1.69	2.35	3.06	3.56	3.48	2.85	2.10	1.45	0.97	0.59	0.34	0.22	0.18	25.6	25.6		
	9	0.19	0.31	0.56	0.96	1.52	2.27	3.30	4.40	5.23	5.07	4.02	2.84	1.90	1.21	0.73	0.41	0.24	0.18	35.3	35.3		
		0.20	0.36	0.65	1.12	1.79	2.79	4.12	5.59	6.59	6.33	4.90	3.40	2.19	1.38	0.83	0.46	0.25	0.18	43.2	43.2		
		0.21	0.38	0.70	1.22	1.95	3.03	4.53	6.07	6.92	6.56	5.05	3.43	2.22	1.44	0.86	0.48	0.26	0.18	45.5	45.5		
		0.21	0.37	0.68	1.17	1.86	2.84	4.19	5.48	6.01	5.66	4.46	3.09	2.04	1.35	0.81	0.45	0.25	0.18	41.1	41.1		
		0.19	0.33	0.59	1.00	1.57	2.31	3.24	4.13	4.29	4.03	3.45	2.52	1.72	1.16	0.70	0.40	0.22	0.17	32.0	32.0		
	-9	0.17	0.27	0.48	0.78	1.20	1.70	2.26	2.71	2.80	2.64	2.33	1.80	1.33	0.90	0.56	0.32	0.20	0.16	22.6	22.6		
	-12	0.15	0.22	0.35	0.57	0.85	1.17	1.46	1.66	1.65	1.57	1.45	1.22	0.93	0.64	0.41	0.25	0.18	0.15	14.9	14.9		
	-15	0.14	0.17	0.25	0.39	0.56	0.75	0.91	1.00	0.96	0.92	0.89	0.76	0.59	0.43	0.28	0.19	0.16	0.14	9.49	9.49		
	-18	0.13	0.14	0.18	0.26	0.36	0.46	0.54	0.57	0.55	0.52	0.51	0.45	0.37	0.27	0.20	0.16	0.14	0.13	5.94	5.94		
	-21	0.12	0.13	0.14	0.17	0.22	0.27	0.32	0.34	0.32	0.31	0.30	0.27	0.22	0.18	0.16	0.14	0.13	0.13	3.88	3.88		
	-24	0.11	0.12	0.12	0.13	0.15	0.17	0.19	0.20	0.19	0.18	0.18	0.17	0.16	0.14	0.13	0.13	0.12	0.11	2.71	2.71		
	-27	0.11	0.11	0.11	0.12	0.12	0.12	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.12	0.12	0.11	0.11	0.10	2.16	2.16		
		-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)				6	9	12	15	18	21	24	27		
Φ t	2.86	4.04	6.37	10.1	15.5	22.6	31.4	39.9	44.3	42.4	34.9	25.7	17.9	12.1	7.74	4.87	3.34	2.77	416				
Φ a	2.86	4.04	6.37	10.1	15.5	22.6	31.4	39.9	44.3	42.4	34.9	25.7	17.9	12.1	7.74	4.87	3.34	2.77		416			

Test System:HOP00 HPG1600
 Temperature:25.3DEG
 Operators:
 Test Date:10-07-2020

Test Set: 5.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:5.150 m
 Remarks:


HOPOO GONIOPHOTOMETERS SYSTEM TEST REPORT

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Report number:

MANUFACTURER:															
Address:															
NAME: 6W								TYPE: WALLVASHER				WEIGHT:			
SPECIFICATION:								DIMENSION: 250*35*65				SERIAL No.: LA/YE6L-990706			

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fC}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

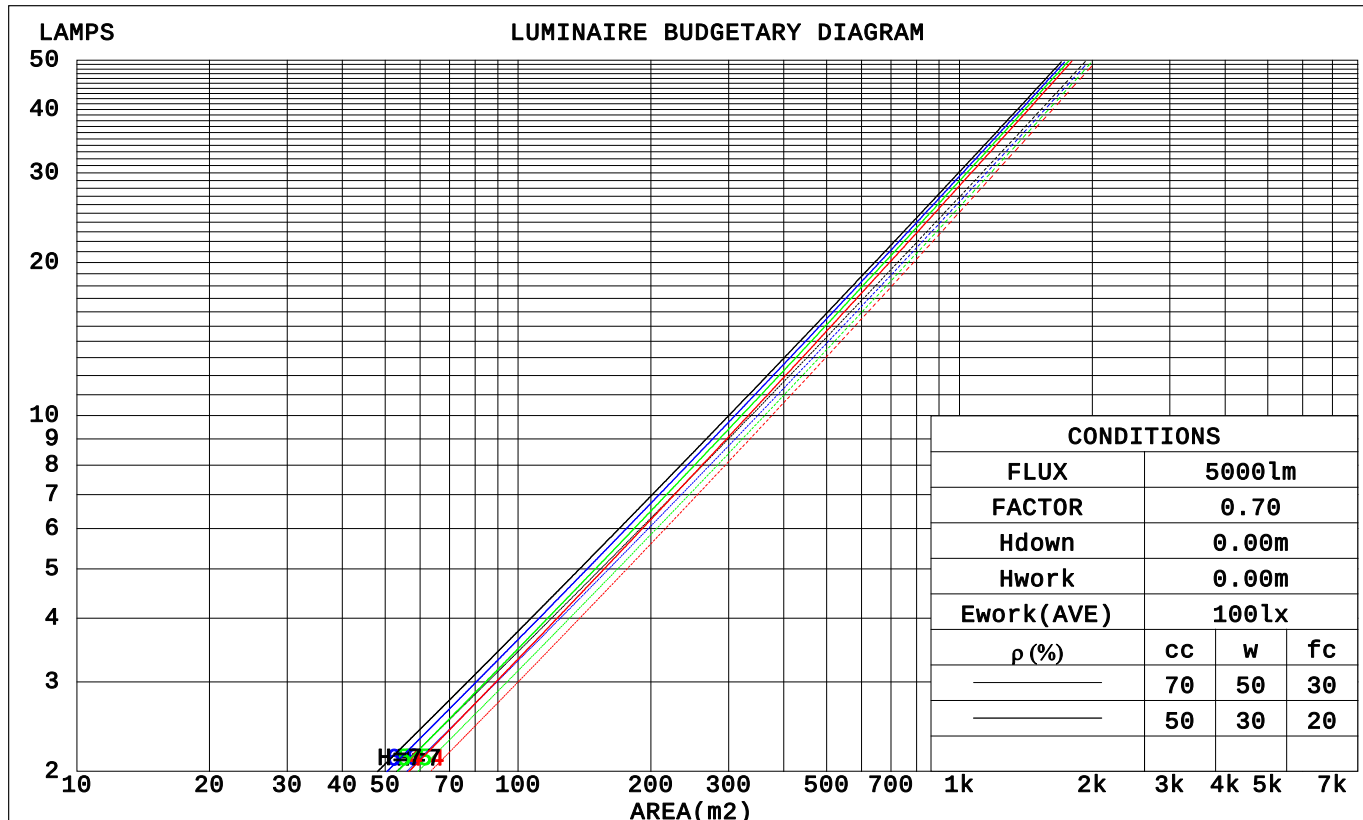

Test System:HOP00 HPG1600
 Temperature:25.3DEG
 Operators:
 Test Date:10-07-2020

Test Set: 5.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:5.150 m
 Remarks:

HOPOO GONIOPHOTOMETERS SYSTEM TEST REPORT

WEC AND CCEC

Report number:

MANUFACTURER:														
Address:														
NAME: 6W							TYPE: WALLVASHER					WEIGHT:		
SPECIFICATION:							DIMENSION: 250*35*65					SERIAL No.: LA/YE6L-990706		

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.169	.096	.030	.162	.092	.029	.149	.086	.027	.138	.079	.026	.127	.074	.024	
2.0	.157	.086	.026	.152	.083	.026	.141	.078	.024	.131	.074	.023	.122	.069	.022	
3.0	.146	.078	.023	.141	.076	.023	.132	.072	.022	.124	.068	.021	.116	.064	.020	
4.0	.136	.070	.021	.132	.069	.020	.124	.066	.020	.117	.063	.019	.111	.060	.018	
5.0	.126	.064	.019	.123	.063	.018	.117	.061	.018	.111	.058	.017	.105	.056	.017	
6.0	.118	.059	.017	.116	.058	.017	.110	.056	.016	.105	.054	.016	.100	.053	.016	
7.0	.111	.055	.016	.109	.054	.015	.104	.053	.015	.099	.051	.015	.095	.049	.015	
8.0	.105	.051	.014	.103	.051	.014	.099	.049	.014	.094	.048	.014	.091	.047	.014	
9.0	.099	.048	.013	.097	.048	.013	.094	.046	.013	.090	.045	.013	.087	.044	.013	
10.0	.094	.045	.013	.093	.045	.012	.089	.044	.012	.086	.043	.012	.083	.042	.012	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.171	.157	.146	.146	.135	.125	.100	.093	.087	.057	.054	.050	.018	.017	.016	
2.0	.154	.133	.114	.132	.114	.099	.091	.079	.069	.052	.046	.040	.017	.015	.013	
3.0	.141	.113	.092	.121	.098	.080	.083	.068	.056	.048	.040	.033	.015	.013	.011	
4.0	.129	.098	.075	.111	.085	.065	.076	.059	.046	.044	.035	.027	.014	.011	.009	
5.0	.119	.086	.063	.102	.075	.054	.070	.052	.038	.041	.031	.023	.013	.010	.008	
6.0	.110	.077	.053	.095	.066	.046	.065	.047	.033	.038	.027	.019	.012	.009	.006	
7.0	.102	.069	.045	.088	.060	.039	.061	.042	.028	.035	.025	.017	.011	.008	.005	
8.0	.096	.062	.039	.082	.054	.034	.057	.038	.024	.033	.022	.014	.011	.007	.005	
9.0	.090	.057	.034	.077	.049	.030	.054	.034	.021	.031	.020	.013	.010	.007	.004	
10.0	.085	.052	.030	.073	.045	.026	.051	.032	.019	.030	.019	.011	.010	.006	.004	

Test System:HOP00 HPG1600
 Temperature:25.3DEG
 Operators:
 Test Date:10-07-2020

Test Set: 5.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:5.150 m
 Remarks:

HOPOO GONIOPHOTOMETERS SYSTEM TEST REPORT

Uncorrected UGR Table

Report number:

MANUFACTURER:											
Address:											
NAME: 6W					TYPE: WALLVASHER			WEIGHT:			
SPECIFICATION:					DIMENSION: 250*35*65			SERIAL No.: LA/YE6L-990706			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	5.2	6.0	5.4	6.2	6.3	2.4	3.2	2.6	3.3	3.5
	3H	6.6	7.3	6.8	7.5	7.7	3.2	3.9	3.5	4.1	4.3
	4H	6.9	7.6	7.2	7.8	8.0	3.3	4.0	3.6	4.2	4.5
	6H	7.1	7.7	7.4	8.0	8.2	3.3	4.0	3.6	4.3	4.5
	8H	7.1	7.8	7.4	8.0	8.3	3.3	4.0	3.6	4.2	4.5
	12H	7.1	7.8	7.5	8.0	8.3	3.3	3.9	3.6	4.2	4.5
4H	2H	5.6	6.3	5.8	6.5	6.7	3.3	4.1	3.6	4.3	4.5
	3H	7.0	7.6	7.3	7.9	8.2	4.2	4.9	4.6	5.1	5.4
	4H	7.4	8.0	7.8	8.3	8.6	4.4	5.0	4.8	5.3	5.6
	6H	7.6	8.1	8.0	8.5	8.8	4.5	5.0	4.8	5.3	5.7
	8H	7.7	8.2	8.1	8.5	8.9	4.5	4.9	4.9	5.3	5.7
	12H	7.7	8.2	8.2	8.6	8.9	4.4	4.9	4.9	5.3	5.6
8H	4H	7.4	7.9	7.8	8.2	8.6	4.6	5.1	5.0	5.4	5.8
	6H	7.7	8.1	8.1	8.5	8.9	4.7	5.1	5.2	5.5	5.9
	8H	7.8	8.1	8.2	8.5	9.0	4.8	5.1	5.2	5.5	6.0
	12H	7.9	8.2	8.3	8.6	9.1	4.8	5.1	5.2	5.5	6.0
12H	4H	7.3	7.8	7.8	8.2	8.5	4.6	5.0	5.0	5.4	5.8
	6H	7.6	8.0	8.1	8.4	8.8	4.7	5.1	5.2	5.5	6.0
	8H	7.7	8.1	8.2	8.5	9.0	4.8	5.1	5.3	5.5	6.0
Variations with the observer position at spacings:											
S = 1.0H	+ 0.4 / - 0.4					+ 0.5 / - 0.5					
1.5H	+ 0.9 / - 0.5					+ 0.4 / - 0.7					
2.0H	+ 0.5 / - 0.9					+ 0.5 / - 1.1					

CIE Pub.117 Corrected 416.3 lm Total Lamp Luminous Flux.(8log(F/F0) = -3.0)

Test System:HOP00 HPG1600
 Temperature:25.3DEG
 Operators:
 Test Date:10-07-2020

Test Set: 5.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:5.150 m
 Remarks:

HOPOO GONIOPHOTOMETERS SYSTEM TEST REPORT

UTILIZATION FACTORS TABLE

Report number:

MANUFACTURER:		
Address:		
NAME: 6W	TYPE: WALLVASHER	WEIGHT:
SPECIFICATION:	DIMENSION: 250*35*65	SERIAL No.: LA/YE6L-990706

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	83	76	72	83	76	72	82	75	72	68
0.80	91	84	80	90	84	80	89	83	79	75
1.00	96	89	85	95	89	85	93	89	84	80
1.25	100	94	90	99	94	90	97	92	89	84
1.50	103	98	94	102	97	93	100	95	92	87
2.00	106	102	98	105	101	97	102	99	96	90
2.50	108	104	101	107	103	100	104	100	98	92
3.00	110	106	103	108	105	102	105	102	100	93
4.00	113	109	107	111	108	106	107	105	103	95
5.00	114	111	109	112	110	108	108	106	105	97
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

Test System:HOP00 HPG1600
 Temperature:25.3DEG
 Operators:
 Test Date:10-07-2020

Test Set: 5.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:5.150 m
 Remarks:

HOPOO GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINOUS DISTRIBUTION INTENSITY DATA

Report number:

MANUFACTURER:		
Address:		
NAME: 6W	TYPE: WALLVASHER	WEIGHT:
SPECIFICATION:	DIMENSION: 250*35*65	SERIAL No.: LA/YE6L-990706

UNIT: cd

γ (DEG)	C (DEG)			
	0	90	180	270
0.0	2462	2426	2462	2426
5.0	1640	1363	2148	2471
10.0	863	609	1192	1443
15.0	416	245	590	649
20.0	159	110	247	276
25.0	73.5	48.8	89.2	110
30.0	66.4	31.9	62.8	65.3
35.0	59.7	23.7	60.6	51.4
40.0	47.2	18.5	54.3	30.0
45.0	30.6	15.1	36.2	21.5
50.0	24.9	12.9	26.2	18.0
55.0	22.8	11.5	24.0	15.3
60.0	19.5	9.52	21.2	13.6
65.0	15.5	6.97	17.0	11.2
70.0	10.6	3.84	12.1	8.54
75.0	5.86	2.01	6.76	5.33
80.0	2.94	0.93	3.47	3.02
85.0	1.53	0.45	1.61	1.85
90.0	1.19	0.45	1.27	1.27

Test System:HOP00 HPG1600
Temperature:25.3DEG
Operators:
Test Date:10-07-2020

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:5.150 m
Remarks: