




Lighting Accessories
and
Fixtures
(2024_2025)





LED PANEL LIGHTS



**BACK-LIT PANEL LIGHT** (No Flicker)**ITEM:** LED4M-S-BPL22-40W-5CCT-DV-LVDM


Watt	Dimension	IP	RI	Beam Angle	Cut Size	Voltage	Luminous
15-20 25-30-40W	2*2"	40	80	120°	553*553MM	AC 120-347V 50-60Hz	5000LM

CCT: 3500-4000-5000-5700-6500K (Selectable)

With 3.5MM Sensor Base

Dimmable: 0-10V


**BACK-LIT PANEL LIGHT** (No Flicker)**ITEM:** LED4M-S-BPL24-72W-5CCT-DV-LVDM


Watt	Dimension	IP	RI	Beam Angle	Cut Size	Voltage	Luminous
30-40 50-60-72W	2*4"	40	80	120°	1163*553MM	AC 120-347V 50-60Hz	9000LM

CCT: 3500-4000-5000-5700-6500K (Selectable)

With 3.5MM Sensor Base

Dimmable: 0-10V


**BACK-LIT PANEL LIGHT** (No Flicker)**ITEM:** LED4M-S-BPL14-40W-5CCT-DV-LVDM


Watt	Dimension	IP	RI	Beam Angle	Cut Size	Voltage	Luminous
15-20 25-30-40W	1*4"	40	80	120°	1163*253MM	AC 120-347V 50-60Hz	5000LM

CCT: 3500-4000-5000-5700-6500K (Selectable)

With 3.5MM Sensor Base

Dimmable: 0-10V



BACK-LIT PANEL LIGHT (No Flicker)

ITEM: LED4M-BPL22-SUR-PLC-40W-5CCT-DV-LVDM



Watt	Dimension	IP	RI	Beam Angle	Cut Size	Voltage	Luminous
0-40W	2*2"	40	80	120°	553*553MM	AC 120-277V 50-60Hz	5000LM

CCT: 2700-6500K (Smart Switch)
Smart Dimming: 0-10V

PLC Smart Switch
Scene Mode



PLC BACK-LIT PANEL LIGHT (No Flicker)


ITEM: LED4M-BPL24-SUR-PLC-72W-5CCT-DV-LVDM



Watt	Dimension	IP	RI	Beam Angle	Cut Size	Voltage	Luminous
0-72W	2*4"	40	80	120°	1163*553MM	AC 120-277V 50-60Hz	9000LM

CCT: 2700-6500K (Smart Switch)
Smart Dimming: 0-10V

PLC Smart Switch
Scene Mode



PLC BACK-LIT PANEL LIGHT (No Flicker)

ITEM: LED4M-BPL14-SUR-PLC-40W-5CCT-DV-LVDM



Watt	Dimension	IP	RI	Beam Angle	Cut Size	Voltage	Luminous
0-40W	1*4"	40	80	120°	1163*253MM	AC 120-277V 50-60Hz	5000LM

CCT: 2700-6500K (Smart Switch)
Smart Dimming: 0-10V

PLC Smart Switch
Scene Mode



PLC SMART SWITCH

ITEM: LED4M-SM-PLC800W-K1

Maximum Load	Dimension	Brightness	Wiring	Control	Voltage	Wire Wiring
800W/6.6A	L:4.35*W:2.76 T:0.27*D:1.43"	0-100% (Adjustable)	Single Pole	Touch-Tone	AC 120-277V 50-60Hz	Neutral Single Live

CCT: 2700-6500K (Smart Switch)

Smart Dimming: 0-10V

Turn On/Off

Three Scene Mode



MICROWAVE SENSOR

ITEM: LED4M-MS-HD08VR-MIC-1

Frequency	Microwave Power	Detection Angle	Detection Distance
5.8GHz±75MHz	<0.3MW	30-150° (Without Glass Cover)	≥3M/9FT



PIR SENSOR

ITEM: LED4M-MS-HD08VR-P-1

Warm up Period	Installation Height	Detection Angle	Detection Distance
10S	4M/13.12 Max	Fresnel Lens ≤120° 360° Ceiling Mounted	Radius 2-4M



SURFACE MOUNTED KIT

ITEM: LED4M-SUR-KIT-BPL22

Description:

Surface Mounted Kit
Cut Size: 50*608*608MM
For 2*2" Panel



SURFACE MOUNTED KIT

ITEM: LED4M-SUR-KIT-BPL24

Description:

Surface Mounted Kit
Cut Size: 50*1218*608
For 2*4" Panel



SURFACE MOUNTED KIT

ITEM: LED4M-SUR-KIT-BPL14

Description:

Surface Mounted Kit
Cut Size: 50*1218*308
For 1*4" Panel



LED STRIP LIGHTS





ITEM: LED4M-COB-320P-8-24V



Watt	Cut Size	Voltage	IP	RI	Beam Angle	PCB Size	Package	Luminous
10W/M	0.05M	DC 24V 50-60Hz	20	90	180°	8*2MM	5-10M/Roll	750-1000LM

CCT: 3000-4000K
Double-One End Out Of The Line

Good Flexiblility And Heat Dissipation
Strong Adhesive



ITEM: LED4M-COB-480P-8-24V



Watt	Cut Size	Voltage	IP	RI	Beam Angle	PCB Size	Package	Luminous
10W/M	0.05M	DC 24V 50-60Hz	20	90	180°	8*2MM	5-10M/Roll	750-1000LM

CCT: 3000-4000K
Double-One End Out Of The Line

Good Flexiblility And Heat Dissipation
Strong Adhesive



ITEM: LED4M-COB-320P-6.6-24V



Watt	Cut Size	Voltage	IP	RI	Beam Angle	PCB Size	Package	Luminous
7W/M	12MM	DC 24V 50-60Hz	20	90	180°	6.6*2MM	5-10M/Roll	600LM

CCT: 3000-4000K
Double-One End Out Of The Line

Good Flexiblility And Heat Dissipation
Strong Adhesive

**ITEM: LED4M-COB-320P-8-24V**

Watt	Cut Size	Voltage	IP	RI	Beam Angle	PCB Size	Package	Luminous
9W/M	5CM	DC 24V 50-60Hz	65	90	120°	8MM	5M/Roll	850LM

CCT: 3000-4000K
Double-One End Out Of The Line


Good Flexiblility And Heat Dissipation
Strong Adhesive

**ITEM: LED4M-COB-480P-8-24V**

Watt	Cut Size	Voltage	IP	RI	Beam Angle	PCB Size	Package	Luminous
10W/M	5CM	DC 24V 50-60Hz	65	90	120°	8MM	5M/Roll	75-95LM

CCT: 3000-4000K
Double-One End Out Of The Line

Good Flexiblility And Heat Dissipation
Strong Adhesive

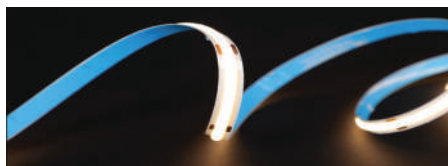**ITEM: LED4M-COB-480P-8-24V**

Watt	Cut Size	Voltage	IP	RI	Beam Angle	PCB Size	Package	Luminous
10W ±10%/M	3CM	DC 24V 50-60Hz	20	90	180°	8MM	5-10M/Roll	750-1000LM

CCT: 4000K



ITEM: LED4M-2022-288P-8-120V



Watt	Cut Size	Voltage	IP	RI	Beam Angle	PCB Size	Package	Luminous
8.5W/M	0.25M	DC 120V 50-60Hz	65	80	120°	12*7MM	50M/Roll	580LM

CCT: 2800-4000-6000K
Surface-Embed



ITEM: LED4M-U0408-2835-140P-24V



Watt	Cut Size	Voltage	IP	RI	Beam Angle	PCB Size	Package	Luminous
7W/M	0.007M	DC 24V 50-60Hz	65	80	180°	4*8MM	5-10M/Roll	350LM

CCT: 2700-4000-6000K
Double-One End Out Of The Line/ With-No Edge

Good Flexiblity And Heat Dissipation Tape
Side Bending



ITEM: LED4M-U0606-2219-240P-24V



Watt	Cut Size	Voltage	IP	RI	Beam Angle	PCB Size	Package	Luminous
5W/M	0.025M	DC 24V 50-60Hz	65	90	120°	6.6MM	5-10M/Roll	350LM

CCT: 3000-4000K
Double End Out Of The Line/ With-No Edge

Good Flexiblity And Heat Dissipation Tape
Side Bending

**ITEM:** LED4M-2219-240P-8-24V

Watt	Cut Size	Voltage	IP	RI	Beam Angle	PCB Size	Package	Luminous
10W/M	5CM	DC 24V 50-60Hz	20	90	120°	10*5MM	10M/Roll	1200LM

CCT: 3000-4000K

Double End Out Of The Line


**ITEM:** LED4M-U0812-2835-126P-8-24V

Watt	Cut Size	Voltage	IP	RI	Beam Angle	PCB Size	Package	Luminous
9W/M	5.5CM	DC 24V 50-60Hz	67	80	120°	8*12MM	5M/Roll	480LM

CCT: 3000-4000K**ITEM:** LED4M-U1010-2835-126P-8-24V

Watt	Cut Size	Voltage	IP	RI	Beam Angle	PCB Size	Package	Luminous
9W/M	5.5CM	DC 24V 50-60Hz	67	80	128°	10*10MM	5M/Roll	850LM

CCT: 3000-4000K

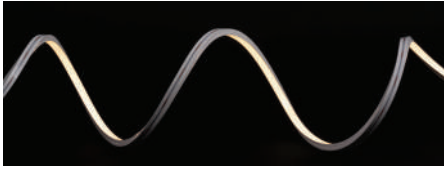**ITEM:** LED4M-U1515-2835-126P-8-24V

Watt	Cut Size	Voltage	IP	RI	Beam Angle	PCB Size	Package	Luminous
9W/M	5CM	DC 24V 50-60Hz	65	80	120°	15*15MM	5M/Roll	560LM

CCT: 3000-4000K

**ITEM:** LED4M-COB-360P-10-120V

Watt	Cut Size	Voltage	IP	RI	Beam Angle	PCB Size	Package	Luminous
9W ±10%/M	0.25M	AC 120V 50-60Hz	65	80	120°	12*5MM	50M/Roll	600LM

CCT: 3000-4000K

**ITEM:** LED4M-U150-2835-108P-120V

Watt	Cut Size	Voltage	IP	RI	Beam Angle	PCB Size	Package	Luminous
8W ±10%/M	0.5M	AC 120V 50-60Hz	65	80	120°	15*26MM	50M/Roll	200 ±10%LM

CCT: 2700-3000-4000K

**ITEM:** LED4M-U500-2835-108P-120V

Watt	Cut Size	Voltage	IP	RI	Beam Angle	PCB Size	Package	Luminous
8W ±10%/M	0.5M	AC 120V 50-60Hz	65	80	120°	18.5*10.5MM	50M/Roll	200 ±10%LM

CCT: 2700-3000-4000K

**ITEM:** LED4M-U350-2835-108P-120V

Watt	Cut Size	Voltage	IP	RI	Beam Angle	PCB Size	Package	Luminous
6W ±10%/M	0.5M	AC 120V 50-60Hz	65	80	120°	16*8MM	50M/Roll	100 ±10%LM

CCT: 2700-3000-4000K

**ITEM:** LED4M-NEON-5050-60P-8-120V

Watt	Cut Size	Voltage	IP	RI	Beam Angle	PCB Size	Package	Luminous
8W ±10%/M	0.5M	AC 120V 50-60Hz	65	80	120°	15*8MM	50M/Roll	450 ±10%LM

CCT: 2700-3000-4000K



DOWN LIGHTS





3" Recessed LED Down Light

ITEM: LED4M-3-TR-OD92-9W-5CCT-DIM

Watt	Dimension	IP	RI	Beam Angle	Cut Size	Voltage	Luminous
9W	H:47*D:92MM	40	90	36°	75MM	AC 100-130V 50-60Hz	630LM

CCT: 2700-3000-3500-4000-5000K (Adjustable)
Dimmable**Reflector Color:** White-Black
Osram Chip

4" Recessed LED Down Light

ITEM: LED4M-4-TR-OD118-12W-5CCT-DIM

Watt	Dimension	IP	RI	Beam Angle	Cut Size	Voltage	Luminous
12W	H:50*D:118MM	40	90	36°	95MM	AC 100-130V 50-60Hz	840LM

CCT: 2700-3000-3500-4000-5000K (Adjustable)
Dimmable**Reflector Color:** White-Black
Osram Chip

2" Trimless LED Down Light

ITEM: LED4M-2-TR-OD81-8W-5CCT-DIM

Watt	Dimension	IP	RI	Beam Angle	Cut Size	Voltage	Luminous
8W	H:70*D:81MM	40	90	36°	55MM	AC 100-130V 50-60Hz	560LM

CCT: 2700-3000-3500-4000-5000K (Adjustable)
Dimmable**Reflector Color:** White-Black
Osram Chip



3" Trimless LED Down Light

ITEM: LED4M-3-TR-OD100-12W-5CCT-DIM


Watt	Dimension	IP	RI	Beam Angle	Cut Size	Voltage	Luminous
12W	H:85*D:100MM	40	90	36°	75MM	AC 100-130V 50-60Hz	840LM

CCT: 2700-3000-3500-4000-5000K (Adjustable)
Dimmable**Reflector Color:** White-Black
Osram Chip

3" Recessed LED Gimbal Light

ITEM: LED4M-3-RG-12W-5CCT-DIM


Watt	Dimension	IP	RI	Beam Angle	Cut Size	Voltage	Luminous
12W	H:64*D:94MM	40	90	36°	80-85MM	AC 100-130V 50-60Hz	840LM

CCT: 2700-3000-3500-4000-5000K (Adjustable)
Dimmable**Reflector Color:** White-Black
Osram Chip

4" Recessed LED Gimbal Light

ITEM: LED4M-4-RG-15W-5CCT-DIM


Watt	Dimension	IP	RI	Beam Angle	Cut Size	Voltage	Luminous
15W	H:68*D:114MM	40	90	36°	95-105MM	AC 100-130V 50-60Hz	1000LM

CCT: 2700-3000-3500-4000-5000K (Adjustable)
Dimmable**Reflector Color:** White-Black
Osram Chip



5" Recessed LED Gimbal Light

ITEM: LED4M-5-RG-24W-5CCT-DIM

Watt	Dimension	IP	RI	Beam Angle	Cut Size	Voltage	Luminous
24W	H:74*D:140MM	40	90	36°	120-130MM	AC 100-130V 50-60Hz	2000LM

CCT: 2700-3000-3500-4000-5000K (Adjustable)
Dimmable

Reflector Color: White-Black
Osram Chip




4" Multi Fit LED Disk Light

ITEM: LED4M-4-MAG-9W-5CCT-DIM

Watt	Dimension	IP	RI	Beam Angle	Cut Size	Voltage	Luminous
9W	H:40*D:125MM	40	90	110°	108MM	AC 100-130V 50-60Hz	750LM

CCT: 2700-3000-3500-4000-5000K (Adjustable)
Dimmable

Trim Color: White-Black



6" Mounting Plate Round Hole Without Lip

ITEM: LED4M-PLATE13-6C

Dimension	Hole Size	Thickness	Material
0.7*215*336MM	57-80-108-130-159MM	0.7MM	Galvanized Metal

Two Side With Ruler
Both Sides With Markings

Plate With 4 Lines And Two Punches



NEPTON (4" Round 360° Gimbal Light)


ITEM: MB14021201001



Watt	Dimension	IP	RI	Beam Angle	Cut Size	Voltage	Luminous
9W	H:49*D:125MM	20	80	38°	96MM	AC 120V 60Hz	630LM

CCT: 3000-4000-5000K (Adjustable)

Dimmable



APOLO


ITEM: MB1402121201022



Watt	Dimension	IP	RI	Beam Angle	Cut Size	Voltage	Luminous
9W	H:12*D:120MM	20	80-85	38°	100-110MM	AC 100-130V 60Hz	720-810LM

CCT: 2700-3000-3500-4000-5000K (Adjustable)

No Flicker And Noise



APOLO

ITEM: MB1402121201023



Watt	Dimension	IP	RI	Beam Angle	Cut Size	Voltage	Luminous
12W	H:12*D:170MM	20	80-85	38°	150-160MM	AC 100-130V 60Hz	960-1080LM

CCT: 2700-3000-3500-4000-5000K (Adjustable)

No Flicker And Noise



MARS

ITEM: MB1402121201024

Watt	Dimension	IP	RI	Beam Angle	Cut Size	Voltage	Luminous
9W	H:12*D:120MM	20	80-85	38°	100-110MM	100-130V AC/60Hz	720-810LM

CCT: 2700-6500K+RGB

Work With Alexa-Google Assistant

Wi-Fi-Bluetooth LED Retrofit Light



TITAN (Fire Proof)

ITEM: MB1402121201025

Watt	Dimension	IP	RI	Beam Angle	Cut Size	Voltage	Luminous
9W	H:24*D:125MM	20	80-85	38°	105MM	100-130V AC/60Hz	720-810LM

CCT: 2700-3000-3500-4000-5000K (Adjustable)


Dimmable

Air Tight Rated

2 Hour Fire Rating Tested To Comply



SWITCH AND RECEPTACLES

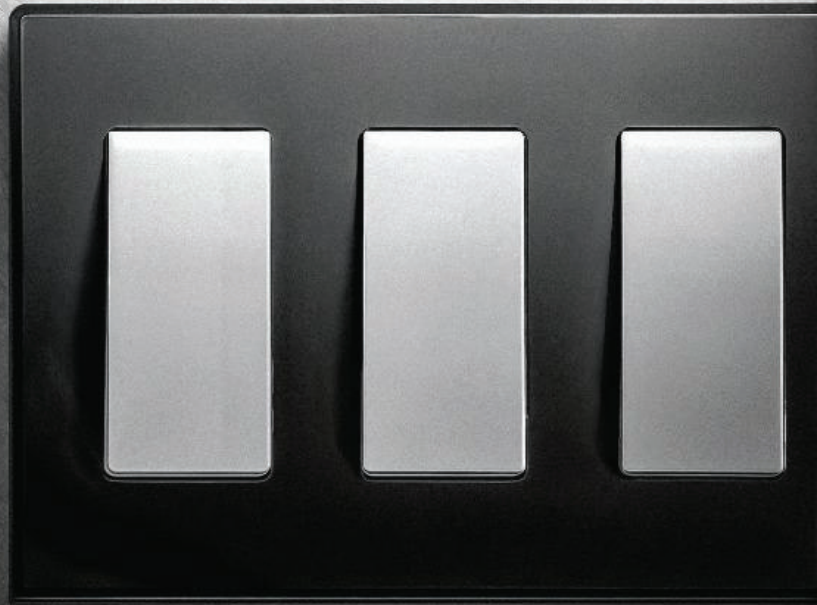

**ITEM: MBDS15****Description:**

15A / 120-277V / Decorative Rocker Switch/ Single Pole
White Color

**ITEM: MBDS15****Description:**

15A / 120-227V / Decorative Rocker Switch / Single Pole
Black Color

**ITEM: MBDS15.3****Description:**

15A / 120-277V / Decorative Rocker Switch / 3-Ways
White Color

**ITEM: MBDS15.3****Description:**

15A / 120-227V / Decorative Rocker Switch / 3-Ways
Black Color

**ITEM:** MBDT15Q**Description:**

15A / 125V AC / Decorative TR Receptacle / Push-In Wire
White Color

**ITEM:** MBDT15Q**Description:**

15A / 125V AC / Decorative TR Receptacle / Push-In Wire
Black Color

**ITEM:** MBGW15**Description:**

15A / 125V / Self-Test GFCI / UL943 2018 Version
TR&WR Weather Resistant
White Color

**ITEM:** MBGW15**Description:**

15A / 125V / Self-Test GFCI / UL943 2018 Version
TR&WR Weather Resistant
Black Color

**ITEM:** MBFTR15QC**Description:**

15A / 125V / 20W / Quick Charger PD3.0+QC3.0 USB / Outlet
White Color

**ITEM:** MBFTR15QC**Description:**

15A / 125V / 20W / Quick Charger PD3.0+QC3.0 USB / Outlet
Black Color

**ITEM:** MBBSS01**Description:**

American standard / 120V 60HZ 600W / AC Power / Single Pole
Incandescent Dimmer Switch
White Color

**ITEM:** MBBSSK-1**Description:**

15A / 120-277V / US standard / Single Pole
Double Decorative Switch On/Off
White Color

**ITEM:** MBBS1803**Description:**

1 Gang Standard / Decorative Screwless Wallplate

70*115mm 2.75*4.53"


White Color

**ITEM:** MBBS1803**Description:**

1 Gang Standard / Decorative Screwless Wallplate

70*115mm 2.75*4.53"

Black Color

**Description:**

2 Gang Standard / Decorative Screwless Wallplate

116*115mm 4.56*4.53"

White Color

**ITEM:** MBBS18032**Description:**

2 Gang Standard / Decorative Screwless Wallplate

116*115mm 4.56*4.53"

Black Color

**ITEM:** MBBS18033**Description:**

3 Gang Standard / Decorative Screwless Wallplate

162*115mm 6.38*4.53"


White Color

**ITEM:** MBBS18033**Description:**

3 Gang Standard / Decorative Screwless Wallplate

162* 115mm 6.38*4.53"

Black Color

**ITEM:** MBBS18034**Description:**

4 Gang Standard / Decorative Screwless Wallplate

208*115mm 8.19*4.53"

White Color

**ITEM:** MBBS18034**Description:**

4 Gang Standard / Decorative Screwless Wallplate

208*115mm 8.19*4.53"

Black Color



GARDEN LIGHTS

ANTIQUE SERIES





ANTIQUE (Pillar Lamp)

ITEM: MB1402121201013

Bulb Wattage	Dimension	IP	Voltage	Bulb Base	Certification
60W	L:6.3 W:6.3*H:17.1"	44	120V	E26	Celt



ANTIQUE (Pendant Lamp)

ITEM: MB1402121201014

Bulb Wattage	Dimension	IP	Voltage	Bulb Base	Certification
60W	L:6.3 W:6.3*H:13.6"	23	120V	E26	Celt

60CM Length Chain



ANTIQUE (Wall Lamp)

ITEM: MB1402121201012

Bulb Wattage	Dimension	IP	Voltage	Bulb Base	Certification
60W	L:6.3 W:7.48*H:15"	23	120V	E26	Celt

**ANTIQUE** (Pillar Lamp)**ITEM:** MB1402121201016

Bulb Wattage	Dimension	IP	Voltage	Bulb Base	Certification
60W	L:8 W:5.9*H:14.9"	44	120V	E26	Celt

**ANTIQUE** (Pendant Lamp)**ITEM:** MB1402121201017

Bulb Wattage	Dimension	IP	Voltage	Bulb Base	Certification
60W	L:8 W:8*H:11.8"	23	120V	E26	Celt

60CM Length Chain

**ANTIQUE** (Wall Lamp)**ITEM:** MB1402121201015

Bulb Wattage	Dimension	IP	Voltage	Bulb Base	Certification
60W	L:8 W:7.3*H:11.8"	23	120V	E26	Celt



ANTIQUE (Garden Lamp)

ITEM: MB1402121201021

Bulb Wattage	Dimension	IP	Voltage	Bulb Base	Certification
60W	L:5.9 W:5.9*H:53.5"	44	120V	E26	Celt

1M Pole



ANTIQUE (Pillar Lamp)

ITEM: MB1402121201019

Bulb Wattage	Dimension	IP	Voltage	Bulb Base	Certification
60W	L:5.9 W:5.9*H:18.1"	44	120V	E26	Celt



ANTIQUE (Pendant Lamp)

ITEM: MB1402121201020

Bulb Wattage	Dimension	IP	Voltage	Bulb Base	Certification
60W	L:5.9 W:5.9*H:13.7"	23	120V	E26	Celt

60CM Length Chain

**ANTIQUE** (Wall Lamp)**ITEM:** MB1402121201018

Bulb Wattage	Dimension	IP	Voltage	Bulb Base	Certification
60W	L:5.9 W:7.8*H:17.3"	23	120V	E26	Celt

**ANTIQUE** (Garden Lamp)**ITEM:** MB1402121201008

Bulb Wattage	Dimension	IP	Voltage	Bulb Base	Certification
60W	L:8.66 W:5.9*H:53.15"	44	120V	E12*2	Celt

1M Pole

**ANTIQUE** (Post Lamp)**ITEM:** MB1402121201006

Bulb Wattage	Dimension	IP	Voltage	Bulb Base	Certification
60W	L:8.66 W:6.69*H:18.5"	44	120V	E12*2	Celt



ANTIQUE (Pendant Lamp)

ITEM: MB1402121201007

Bulb Wattage	Dimension	IP	Voltage	Bulb Base	Certification
60W	L:8.66 W:6.69*H:13.4"	23	120V	E12*2	Celt

60CM Length Chain



ANTIQUE (Wall Lamp)

ITEM: MB1402121201005

Bulb Wattage	Dimension	IP	Voltage	Bulb Base	Certification
60W	L:8.66 W:6.69*H:13.38"	23	120V	E12*2	Celt



ANTIQUE (Pillar Lamp)

ITEM: MB1402121201010

Bulb Wattage	Dimension	IP	Voltage	Bulb Base	Certification
60W	L:10.4 W:10.4*H:25"	44	120V	E12*2	Celt

Change Lamp Holder To



ANTIQUE (Pendant Lamp)

ITEM: MB1402121201011

Bulb Wattage	Dimension	IP	Voltage	Bulb Base	Certification
60W	L:10.4 W:10.4*H:19.8"	23	120V	E12*2	Celt

60CM Length Chain



ANTIQUE (Wall Lamp)

ITEM: MB1402121201009

Bulb Wattage	Dimension	IP	Voltage	Bulb Base	Certification
60W	L:10.4 W:12.2*H:19.8"	23	120V	E12*2	Celt

Change Lamp Holder To

DRIVERS



ITEM: LED4M-LM-EMLV-96W-24V-CL2-DIM



Description:

Input: AC 120V 60Hz / 1.1A / Black-White-Green

Output: DC 24V / 4A / 96W Max / Black-RED / Class 2

Dimmable: ELV-MLV-Triac

ITEM: LED4M-LM-EMLV-150W-24V-5IN1-DIM



Description:

Input: AC 110-277V 50-60Hz / 1.8A / Black-White-Green

Output: DC 24V / 6.25A / 150W Max / Black-RED / Class P

Dimmable: Triac-Phase / 0-10V / 1-10V / Potentiometer / 10V PWM

ITEM: LED4M-LM-EMLV-192W-24V-5IN1-CL2



Description:

Input: AC 110-277V 50-60Hz / 2.2A / Black-White-Green

Output: DC 24V/ 2*4A / 192W Max / Black-RED / Class 2-P/ Type HL

Dimmable: Triac-Phase / 0-10V / 1-10V / Potentiometer / 10V PWM

ITEM: LED4M-LM-EMLV-288W-24V-5IN1-JC5-CL2



Description:

Input: AC 120-277V 50-60Hz / 3.6A / Black-White-Green

Output: DC 24V/ 3*4A / 288W Max / Black-RED / Class 2-P/ Type HL

Dimmable: Triac-Phase / 0-10V / 1-10V / Potentiometer / 10V PWM



PENDANT LIGHTS





CEILING MOUNTED (LED Hover Pendant Lights)

ITEM: LED4MTD22D15A



Watt	Dimension	IP	RI	Beam Angle	Power Factor	Voltage	Luminous
14W	L:150 D:74*CL:0-1500MM	20	90	24°	0.9	AC 120V 50-60Hz	1150LM

CCT: 3000-4000-5000K (Adjustable)
Dimmable

Body Color: Black
Damp Location



HALO ADAPTER TRACK MOUNTED (LED Hover Pendant Light)

ITEM: LED4MTD22D15A-TK



Watt	Dimension	IP	RI	Beam Angle	Power Factor	Voltage	Luminous
14W	L:150 D:74*CL:0-1500MM	20	90	24°	0.9	AC 120V 50-60Hz	1150LM

CCT: 3000-4000-5000K (Adjustable)
Dimmable

Body Color: Black
Damp Location



CEILING MOUNTED (LED Hover Pendant Lights)

ITEM: LED4MTD22D10C



Watt	Dimension	IP	RI	Beam Angle	Power Factor	Voltage	Luminous
10W	H:100 D:67*CL:0-1500MM	20	90	10-55° Adjustable	0.9	AC 120V 50-60Hz	850LM

CCT: 4000-5000K
Dimmable

Body Color: Black
Damp Location



TRACK MOUNTED (LED Hover Pendant Lights)

ITEM: LED4MGD22D10C



Watt	Dimension	IP	RI	Beam Angle	Power Factor	Voltage	Luminous
10W	L:100 D:67*CL:0-1500MM	20	90	10-55° Adjustable	0.9	AC 120V 50-60Hz	850LM

CCT: 4000-5000K
Dimmable

Body Color: Black
Damp Location



MULTI FUNCTIONAL (LED Track Light)

ITEM: LED4MGD16P30EO-5CCT



Watt	Dimension	IP	RI	Beam Angle	Power Factor	Voltage	Luminous
8-12 18-24W	L:150*D:74MM	20	90	15-55° Adjustable	0.9	AC 120V 50-60Hz	2000LM

CCT: 2700-3000-3500-4000-5000K (Adjustable)
Dimmable

Body Color: Black
Damp Location



3WIRES TRACK RAIL

ITEM: LED4M3A-06-6FT

Description:

6Feet-1828MM / Track Single Circuit / 120-250V 50-60Hz / 10A
3-Wires / Including End Cap
Black Color



3WIRES L CONNECTOR

ITEM: LED4M3SL

Description:

3 Wire L Connector / 120-250V 50-60Hz / 10A

L Connector: Connect Two Track Sections at a Right Angle

Black Color



3WIRES POWER CONNECTOR

ITEM: LED4M3SP

Description:

3 Wire Power Connector / 120-250V 50-60Hz / 10A

Live End: Required To Start a Run

Black Color



3WIRES X CONNECTOR

ITEM: LED4M3SX

Description:

3 Wire X Connector / 120-250V 50-60Hz / 10A

X-Connector: Connect Two Track Sections at an Cross Angle


Black Color

**3WIRES MINI I CONNECTOR****ITEM:** LED4M3SMI**Description:**

3 Wire Mini I Connector / 120-250V 50-60Hz / 10A

Mini Joiner: Low Profile Joiner For Two Straight Track Sections

Black Color

**3WIRES END CAP****ITEM:** LED4M3SE**Description:**

3 Wire End Cap / 120-250V 50-60Hz / 10A

Black Color

ACCESSORIES



**SIMON****ITEM:** H_S308RD

Bulb Wattage	Dimension	IP	RI	Cut Size	Bulb Base	Installation Method	CCT
3-15W	45*120*70MM	20	90	67MM	GU10 GU6.3	Gypsum Recessed	3000 4000-6000K

**CASPER****ITEM:** 11002000

Bulb Wattage	Dimension	IP	Base	Cut Size	Materials	Body Color
50W	38*123MM	20	PAR16/MR16	85MM	Iron Body	Black

**CASPER****ITEM:** 11003000

Bulb Wattage	Dimension	IP	Base	Cut Size	Materials	Body Color
50W	38*123MM	20	PAR16/MR16	85MM	Iron Body	White

**CASPER****ITEM:** 11008000


Bulb Wattage	Dimension	IP	Base	Cut Size	Materials	Body Color
50W	123*38*123MM	20	PAR16/MR16	85*85MM	Iron Body	Black

**CASPER****ITEM:** 11009000

Bulb Wattage	Dimension	IP	Base	Cut Size	Materials	Body Color
50W	123*38*123MM	20	PAR16/MR16	85*85MM	Iron Body	White

**CASPER****ITEM:** 11004000

Bulb Wattage	Dimension	IP	Base	Cut Size	Materials	Body Color
50W	123*38*210MM	20	PAR16/MR16	85*165MM	Iron Body	Black

**CASPER****ITEM:** 11005000

Bulb Wattage	Dimension	IP	Base	Cut Size	Materials	Body Color
50W	123*38*210MM	20	PAR16/MR16	85*85MM	Iron Body	White

**CASPER****ITEM:** 11009000

Bulb Wattage	Dimension	IP	Base	Cut Size	Materials	Body Color
50W	123*38*295MM	20	PAR16/MR16	85*250MM	Iron Body	Black

**CASPER****ITEM:** 11007000

Bulb Wattage	Dimension	IP	Base	Cut Size	Materials	Body Color
50W	123*38*295MM	20	PAR16/MR16	85*250MM	Iron Body	White

NOTE:

NOTE:



Address:

7250 Keele Street, Unit 192,
Concord, ON L4K 1Z8

Phone Number:

+1(416) 727-0702
+1(647) 570-5571

WWW.LED4M.CA
INFO@LED4M.CA